



# PVC STRIP CURTAIN

## PRODUCTS CATALOGUE

### PART 1.1: PVC STRIP SERIES


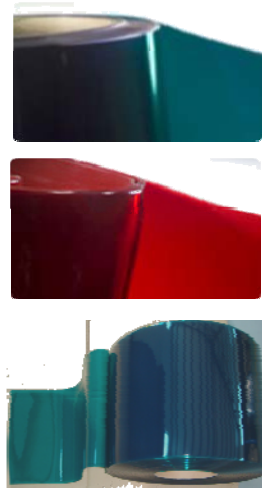
PRODUCTS'	PICTURE	TYPE	DESCRIPTIONS
		<p><b>Standard PVC strip</b> (Normal Tempt Grade)</p>	<p>*Color selection: <u>Blue/ Nature clear</u></p> <p>*Profiles: <u>smooth</u> or <u>double ribbed</u></p> <p>*Application tempt range: <u>-15°C to 50°C</u></p> <p>*Size selection: <u>Thickness range from 1.5mm to 6mm</u> <u>Width range from 150mm to 400mm</u></p> <p>Our standard size:<u>200mm(W)*2mm(T)</u> <u>300mm(W)*3mm(T)</u> <u>400mm(W)*4mm(T)</u></p> <p>*Length per roll: <u>50m</u></p> <p>*Application and your solutions for: <u>Supermarket, Subway entrance, guest house, bar,</u> <u>Industrial strip doors, Sound booths, warehouse,</u> <u>Working areas partitions, porthiles, Industrial curtains</u> <u>and site huts, reservoirs or leisure pools, concreted or</u> <u>tiled swimming pools. It is effective for sound</u> <u>insulation, guard against dust and ultraviolet radiation.</u></p>
		<p><b>Polar PVC strip</b> (Freezer Tempt Grade)</p>	<p>*Color selection: <u>Green clear</u></p> <p>*Profiles: <u>smooth</u> or <u>double ribbed</u></p> <p>*Application tempt range: <u>-50°C to 50°C</u></p> <p>*Size selection: <u>Thickness range from 1.5mm to 6mm</u> <u>Width range from 150mm to 400mm</u></p> <p>Our standard size:<u>200mm(W)*2mm(T)</u> <u>300mm(W)*3mm(T)</u> <u>400mm(W)*4mm(T)</u></p> <p>*Length per roll: <u>50m</u></p> <p>*Application and your solutions for: <u>Refrigerated vehicle and devices, freezer cold rooms.</u> <u>It can prevent cold air from running away and save a</u> <u>great electricity.</u></p>



# PVC STRIP CURTAIN

## PRODUCTS CATALOGUE

### PART 1.2: PVC STRIP SERIES

PRODUCTS'	PICTURE	TYPE	DESCRIPTIONS
		<b>Anti-insects PVC strip</b> (Normal Tempt Grade)	*Color selection: <u>Yellow/ Orange clear</u> *Profiles: <u>smooth</u> or <u>double ribbed</u> *Application tempt range: <u>-15°C to 50°C</u> *Size selection: <u>Thickness range from 1.5mm to 6mm</u> <u>Width range from 150mm to 400mm</u> Our standard size: <u>200mm(W)*2mm(T)</u> <u>300mm(W)*3mm(T)</u> <u>400mm(W)*4mm(T)</u> *Length per roll: <u>50m</u> *Application and your solutions for: <u>Supermarket, guest house, bar, food industrial</u> <u>Workshop, Industrial strip doors, etc. It is</u> <u>effectively guard against dust and dust, fly, mosquito</u> <u>and other insects.</u>
		<b>Anti-static PVC strip</b> (Normal Tempt Grade)	*Color selection: <u>Green /Blue clear</u> *Profiles: <u>smooth</u> or <u>double ribbed</u> *Application tempt range: <u>-15°C to 50°C</u> *Size selection: <u>Thickness range from 1.5mm to 6mm</u> <u>Width range from 150mm to 400mm</u> Our standard size: <u>200mm(W)*2mm(T)</u> <u>300mm(W)*3mm(T)</u> <u>400mm(W)*4mm(T)</u> *Length per roll: <u>50m</u>
		<b>Welding PVC strip</b>	*Color selection: <u>Bronze /Brown/Red clear</u> *Profiles: <u>smooth</u> *Application tempt range: <u>-15°C to 50°C</u> *Size selection: <u>Thickness range from 1.5mm to 6mm</u> <u>Width range from 150mm to 400mm</u> Our standard size: <u>200mm(W)*2mm(T)</u> <u>300mm(W)*3mm(T)</u> *Length per roll: <u>50m</u> *Application and your solutions for: <u>Welding strips can safeguard from flying sparks and da-</u> <u>ngerous glares of welding operations, it can effectively</u> <u>protect against eyes damage by screening out harmful</u> <u>UV rays</u>



# PVC STRIP CURTAIN

## PRODUCTS CATALOGUE

### PART 2: GENERAL STANDARD PRODUCTS COMPARISON TABLE

<b>Standard/Anti-insects PVC strip (Application temperature:-15°C to +50°C)</b>				
PROFILES	STRIPS SPECIFICATION	MIN WIDTH TOLERANCE	MIN THICKNESS TOLERANCE	LENGTH SCOPE
SMOOTH	200MM*2MM*50M	-0.2MM	-0.2MM	50M-53M
SMOOTH	200MM*3MM*50M	-0.2MM	-0.2MM	50M-53M
SMOOTH	200MM*5MM*50M	-0.2MM	-0.35MM	50M-53M
SMOOTH	300MM*2MM*50M	-0.2MM	-0.2MM	50M-53M
SMOOTH	300MM*3MM*50M	-0.2MM	-0.2MM	50M-53M
SMOOTH	300MM*5MM*50M	-0.2MM	-0.35MM	50M-52M
SMOOTH	400MM*3MM*50M	-0.2MM	-0.2MM	50M-53M
SMOOTH	400MM*4MM*50M	-0.2MM	-0.3MM	50M-53M
RIBBED	200MM*2MM*50M	-0.2MM	-0.3MM	50M-53M
RIBBED	300MM*3MM*50M	-0.2MM	-0.35MM	50M-53M
RIBBED	200MM*3MM*50M	-0.2MM	-0.3MM	50M-53M

<b>Polar PVC strip (Application temperature:-50°C to +50°C)</b>				
PROFILES	STRIPS SPECIFICATION	MIN WIDTH TOLERANCE	MIN THICKNESS TOLERANCE	LENGTH SCOPE
SMOOTH	200MM*2MM*50M	-0.2MM	-0.2MM	50M-53M
SMOOTH	200MM*3MM*50M	-0.2MM	-0.2MM	50M-53M
SMOOTH	300MM*2MM*50M	-0.2MM	-0.2MM	50M-53M
SMOOTH	300MM*3MM*50M	-0.2MM	-0.2MM	50M-53M
RIBBED	200MM*2MM*50M	-0.2MM	-0.3MM	50M-53M
RIBBED	300MM*3MM*50M	-0.2MM	-0.35MM	50M-53M

<b>Welding/Anti-static PVC strip (Application temperature:-15°C to +50°C)</b>				
PROFILES	STRIPS SPECIFICATION	MIN WIDTH TOLERANCE	MIN THICKNESS TOLERANCE	LENGTH SCOPE
SMOOTH	200MM*2MM*50M	-0.2MM	-0.2MM	50M-53M
SMOOTH	200MM*3MM*50M	-0.2MM	-0.2MM	50M-53M
SMOOTH	300MM*2MM*50M	-0.2MM	-0.2MM	50M-53M
SMOOTH	300MM*3MM*50M	-0.2MM	-0.2MM	50M-53M



# PVC STRIP CURTAIN

## PRODUCTS CATALOGUE

### PART 3: PVC STRIP MATERIAL TECHNICAL DATA

Properties	Standard	PVC Strip Grade (Normal Tempt Grade)	PVC Strip Grade (Freezer Tempt Grade)	Unit
Density	DIN 53 479	1.20	1.19	g/cm <sup>3</sup>
Shore A Hardness	DIN 53 505	75	63	
Brittle Point	DIN 53 372	Approx -35	Approx -45	Degrees °C
Falling Ball Test	Internal Test	“-35 No Break	“-45 No Break	Degrees °C
Flexibility	DIN 51 949	“-35 No Break	“-45 No Break	Degrees °C
Water Absorption	DIN 53 472	17	21	Mg
Tensile Strength	DIN 53 455	17	13	Mpa
Tensile Stress	DIN 53 455	300	420	%
Rupture Resistance	DIN 53 515	>5	>2	N/mm
Reaction to Fire	DIN 53 382	Self-distinguishing	Self-distinguishing	0
Flammability	Based on US MV SS302	Inflammable	Inflammable	0
Light Transmission		>80	>80	%

### PART 4: REMARKS

\* For PVC strip, we can produce two kind of quality, one is European standard quality(raw material can be compliance with EN71-3 & RoHS standard directives), other is Local source quality. Please ask for quotation based on these quality.